



XP254 BT*

Ball Top

Modular Belt Series

- **Logistic Centers Applications**

Material Handling, Sorting, Packaging

- **Corrugated Cardboard Applications**

Down Stackers, Corrugator Take Off, Strap Feed


*This product is not available in the following countries: Italy, Germany, Great Britain, the Netherlands, and Spain.



MODUTECH[®]
Movement Technologies

XP254 BT* (Ball Top)

Pitch:	25,4 mm / 1 inch
Belt Surface:	Close, Ball Top Surface
Minimum Width:	76,2 mm / 3 inch
Open Area (%):	0%.
Flight:	Yes
Sidewall:	Yes
Pin:	Ø4,5 mm / 0.177 inch - Self Lock
Approved:	FDA and EU
Color:	Blue / Gray
Cleanability:	Good
Belt Thickness:	12,7 mm / 0.5 inch

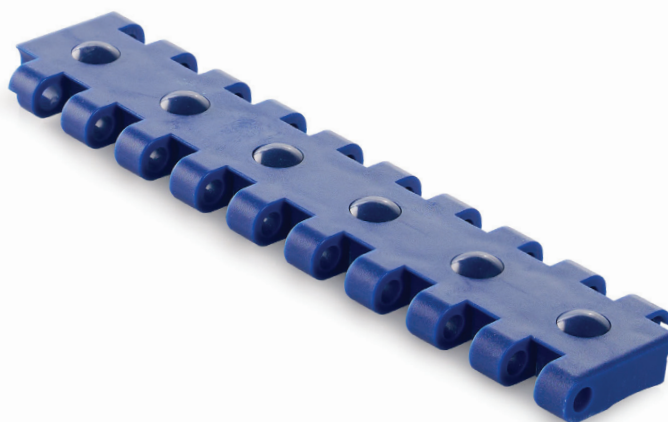


XP254 BT Technical Information

Belt Material		POM
Ball Material		PA
Pin Material		PA
Belt Strength	N/m lb/ft	29500 - 1984
Temperature	°C °F	-40 / +93 -40 / +200
Belt Weight	kg/m ² lb/sqft ²	9.6 / 1.97

Diameter of idling rollers (min.)		Diameter of support rollers (min.)		Diameter for gravity take up center drive rollers (min.)		Backbending radius for elevators without side guards or hold down devices (min.)		Backbending radius for elevators with side guards or hold down devices (min.)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
50	2	50	2	100	4	-	-	-	-

Belt Width mm	152,4	228,6	304,8	381,0	457,2	533,4	609,6	685,8	762,0	838,2	914,4	990,6	1066,8	1143,0	1219,2	1295,4	1371,6
Belt Width inch	6.00	9.00	12.00	15.00	18.00	21.00	24.00	27.00	30.00	33.00	36.00	39.00	42.00	45.00	48.00	51.00	54.00
Belt Width mm	1447,8	1524,0	1600,2	1676,4													
Belt Width inch	57.00	60.00	63.00	66.00													

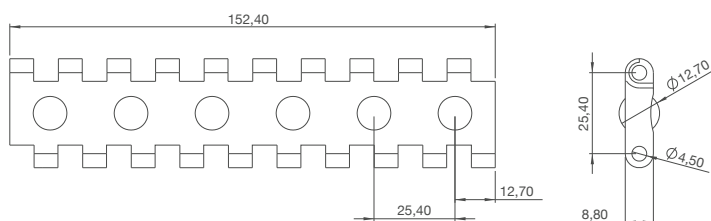

Product Features and Functional Benefits

- Unique sprocket engagement - higher product load and longer conveyors.
- Unique sprocket engagement reduces pulsation and increases load capacity.
- Designed for multi-directional product handling.
- Extra power, bi-directional belt for long conveyors.
- Chamfered belt edges.

Important Notes

- **Standard belt increments 76,2 mm.**
- Please contact with customer service for precise belt measurements.
- Physical belt widths are generally 0.1% to 0.3% smaller.
- Special raw materials and additional colors available.

XP254 Series



Sprockets and Technical Specifications



Z18



Z18

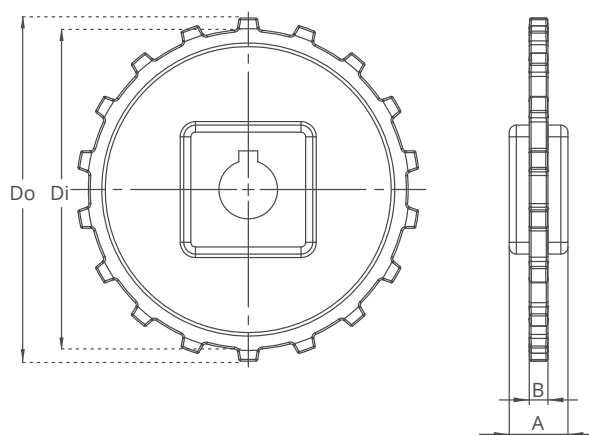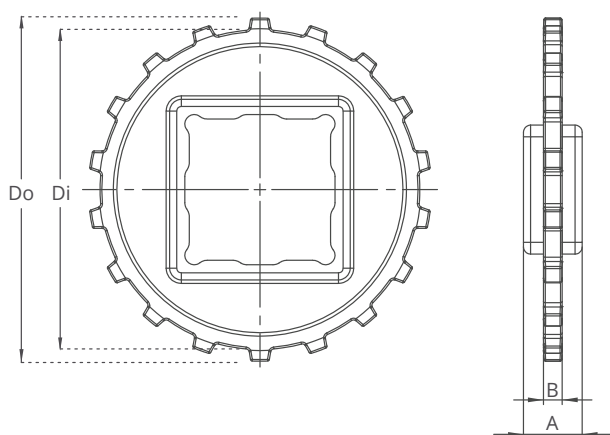

XP254 Series / Standard Sprockets Dimensions



Split molded sprockets are available for the products with "Red" font color.

NO. TEETH	Di mm/inch	Do mm/inch	B mm/inch	A mm/inch	Square Bore (Q) mm/inch		Round Bore (R) mm/inch		PRODUCT CODE	
									Square Type (Q)	Round Type (R)
Z8	53,2 / 2.09	64,0 / 2.52	8 / 0.31	25 / 0.98	25	-	25-30	1-1.25	XP254SQZ8*PA	XP254SRZ8*PA
Z10	71,5 / 2.82	81,2 / 3.2	8 / 0.31	25 / 0.98	25-40	1-1.5	25-30	1-1.25	XP254SQZ10*PA	XP254SRZ10*PA
Z12	88,1 / 3.50	98,1 / 3.86	8 / 0.31	25 / 0.98	40	1.5	25-30	1-1.25	XP254SQZ12*PA	XP254SRZ12*PA
Z15*	112,8 / 4.44	122,4 / 4.82	8 / 0.31	25 / 0.98	40-60	1.5-2.5	25-30	1-1.25	XP254SQZ15*PA	XP254SRZ15*PA
Z18*	136,4 / 5.37	146,4 / 5.76	8 / 0.31	25 / 0.98	40-60	1.5-2.5	25-30	1-1.25	XP254SQZ18*PA	XP254SRZ18*PA

*Other sprockets and hub sizes are manufactured up to request. *POM (Acetal) and PP (Polypropylene) sprockets raw material is available on request.


*Machined Split Sprockets are available for each size.




Clamp



Machined Split Sprocket

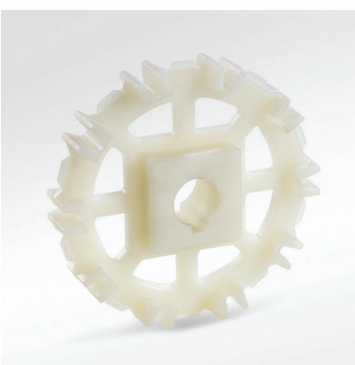


Moulded Sprocket

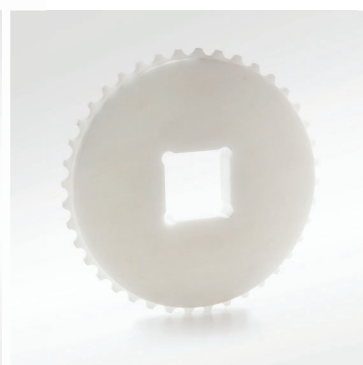

Machined Sprocket

XP254 Series

Engineering Information

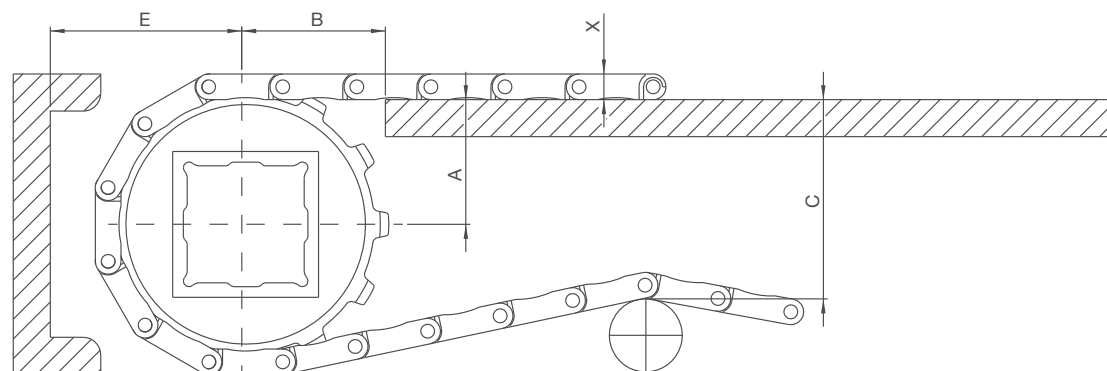


A - $\pm 0,031"$ (1mm)
B - $\pm 0,125"$ (3mm)
C - $\pm$ (Max.)
E - $\pm$ (Min.)

XP254 Series / Conveyor Frame Dimensions

Sprockets Description			A		B		C		E		X	
Pitch Diameter		No.Teeth	Range (Bottom to Top)		inch	mm	inch	mm	inch	mm	inch	mm
inch	mm		inch	mm								
XP254 C, XP254 PR4%, XP254 PR22%, XP254 FG												
2.32	59,0	8	1.17	29,8	1.43	36,5	1.94	49,3	1.91	48,6	0.35	8,8
2.99	76,0	10	1.47	37,0	1.69	42,9	2.57	65,4	2.21	56,2	0.35	8,8
3.59	91,2	12	1.79	45,5	1.86	47,3	3.19	81,1	2.53	64,3	0.35	8,8
4.65	118,0	15	2.22	56,3	2.13	54,1	4.15	105,3	2.96	75,1	0.35	8,8
5.67	144,0	18	2.71	69,0	2.31	58,7	5.16	131,0	3.45	87,8	0.35	8,8
XP254 BT												
2.32	59,0	8	1.17	29,8	1.44	36,5	1.94	49,3	2.03	51,6	0.50	12,7
2.99	76,0	10	1.47	37,0	1.69	42,9	2.57	65,4	2.33	59,2	0.50	12,7
3.59	91,2	12	1.79	45,5	1.86	47,3	3.19	81,1	2.65	67,3	0.50	12,7
4.65	118,0	15	2.22	56,3	2.13	54,1	4.15	105,3	3.07	78,1	0.50	12,7
5.67	144,0	18	2.71	69,0	2.31	58,7	5.16	131,0	3.57	90,8	0.50	12,7
XP254 GT												
2.32	59,0	8	1.17	29,8	1.43	36,5	2.06	52,3	2.03	51,6	0.46	11,8
2.99	76,0	10	1.47	37,0	1.69	42,9	2.69	68,3	2.33	59,2	0.46	11,8
3.59	91,2	12	1.79	45,5	1.86	47,3	3.32	84,3	2.65	67,3	0.46	11,8
4.65	118,0	15	2.22	56,3	2.13	54,1	4.26	108,3	3.07	78,1	0.46	11,8
5.67	144,0	18	2.71	69,0	2.31	58,7	5.27	134,0	3.57	90,8	0.46	11,8

XP254 Series / Slider Support System For Straight Running Belts

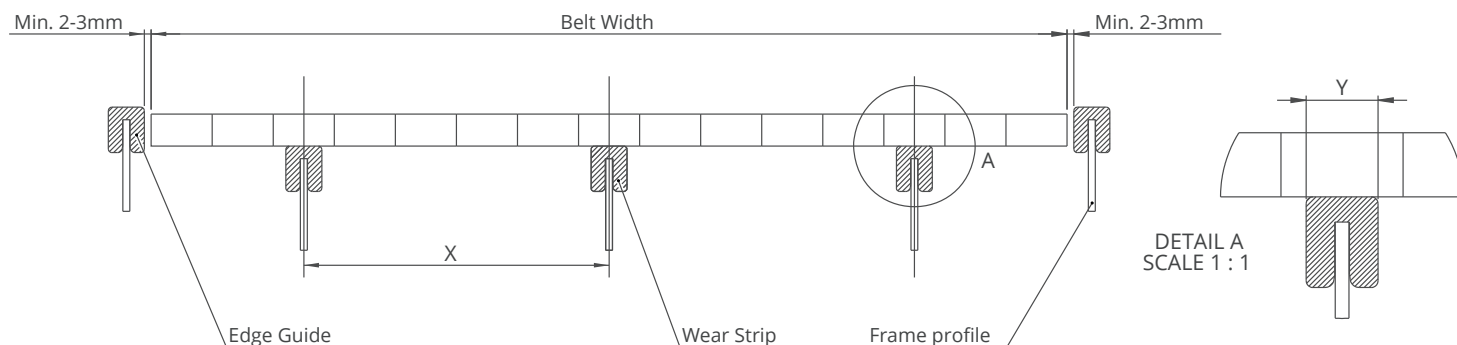


Note: The distances between the carryway wear strips (X) may be changed to due to operation conditions and transported load. In general, we recommend;

100-200mm for 2" belts
100-145mm for 1"belts
100-145mm for 0,5" belts
70-120mm for 0,3" belts

For specific applications, please contact with Modutech representatives.

XP254 Series

Engineering Information

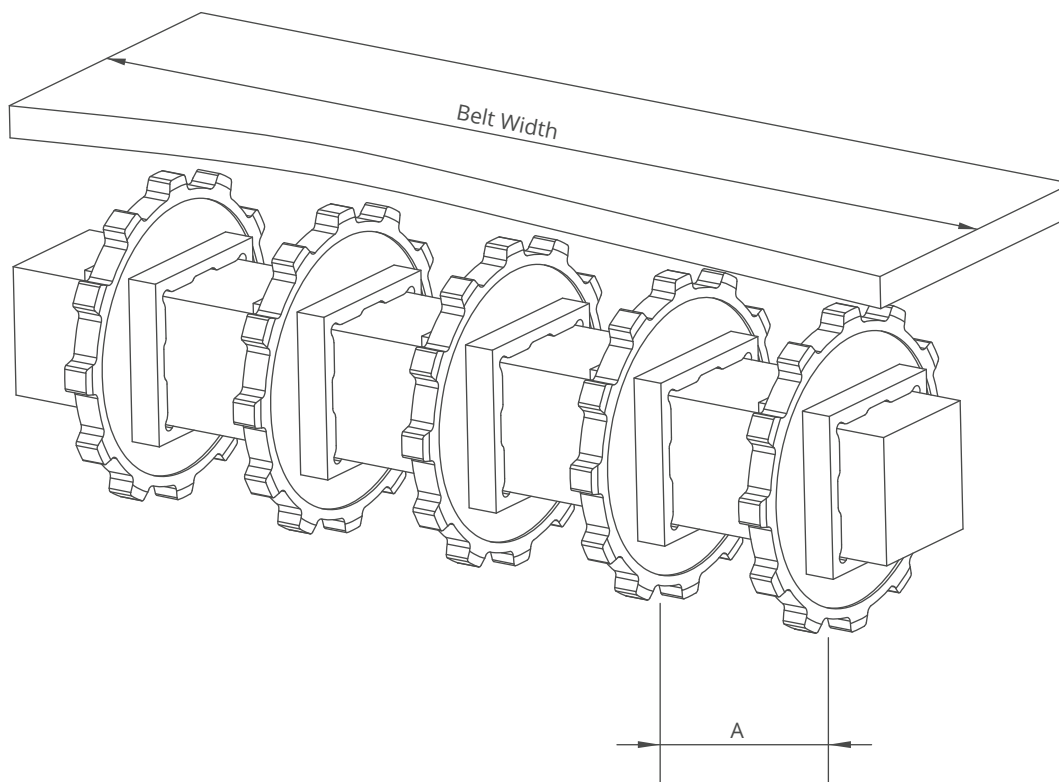

XP254 Series / Sprockets Arrangement

Standard Belt Width		Number of sprockets per shaft		A (mm/inch)	
mm	inch	Drive Shaft	Return Shaft	Min.	Max.
152,4	6.0	2	2	60/2.36	170/6.6
228,6	9.0	2	2	60/2.36	170/6.6
304,8	12.0	3	2	60/2.36	170/6.6
381,0	15.0	4	3	60/2.36	170/6.6
457,2	18.0	5	3	60/2.36	170/6.6
533,4	21.0	5	3	60/2.36	170/6.6
609,6	24.0	6	3	60/2.36	170/6.6
685,8	27.0	6	4	60/2.36	170/6.6
762,0	30.0	7	4	60/2.36	170/6.6
838,2	33.0	7	4	60/2.36	170/6.6
914,4	36.0	8	4	60/2.36	170/6.6
990,6	39.0	8	5	60/2.36	170/6.6
1066,8	42.0	9	5	60/2.36	170/6.6
1143,0	45.0	9	5	60/2.36	170/6.6
1219,2	48.0	10	5	60/2.36	170/6.6
1295,4	51.0	10	6	60/2.36	170/6.6
1371,6	54.0	11	7	60/2.36	170/6.6
1447,8	57.0	11	7	60/2.36	170/6.6
1524,0	60.0	12	7	60/2.36	170/6.6
1600,2	63.0	12	8	60/2.36	170/6.6
1676,4	66.0	12	8	60/2.36	170/6.6
1752,6	69.0	13	8	60/2.36	170/6.6
1828,8	72.0	14	9	60/2.36	170/6.6
1905,0	75.0	14	9	60/2.36	170/6.6
1981,2	78.0	15	10	60/2.36	170/6.6
2057,4	81.0	15	10	60/2.36	170/6.6

Note: Number of sprockets depends on the belt load.