



XP254 C

Modular Belt Series

- **Seafood Applications**

Inspection Tables, Grading Lines, Trim Lines

- **Bakery Applications**

Raw Dough Handling, Cooling Lines, Packing Lines

- **Snack Food Applications**

Corn Processing

- **Fruits and Vegetables Applications**

Bulk Feeding, Elevator, Control - Sorting Table

- **Tire Manufacturing Applications**

Mixer Infeed - Outfeed, Calendering Infeed, Extrusion Outfeed

- **Packaging Applications**

Labelling, Case Packers, Tray Packers, Palletizing - Depalletizing

- **Printing and Paper Applications**

Printing Machine Outfeed, Wrapping Machine Outfeed

- **Beverages and Bottling Applications**

Can Palletizing and Depalletizing, Glass Palletizing and Depalletizing,

Pet Palletizing and Depalletizing

- **Material Handling Applications**


Incline Applications, Palletizers, Packaging Lines



MODUTECH[®]
Movement Technologies

XP254 C

Pitch:	25,4 mm / 1 inch
Belt Surface:	Close, Smooth Surface
Minimum Width:	76,2 mm / 3 inch
Open Area (%):	0%
Flight:	Yes
Sidewall:	No
Pin:	Ø4,5 mm / 0.177 inch - Self Lock
Approved:	FDA and EU
Color:	Blue / White / Gray
Cleanability:	Good
Belt Thickness:	8.8 mm / 0.346 inch

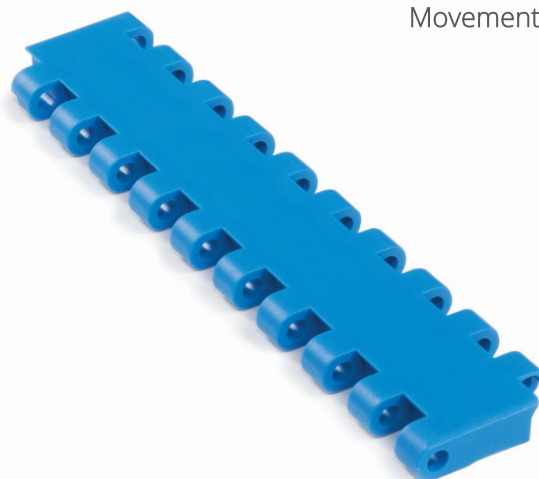


XP254 C Technical Information

Belt Material		POM	POM	POM	PP	PP	PE
Pin Material		PA	POM	PP	PP	POM	POM
Belt Strength	N/m lb/ft	30000 - 2055	30000 - 2055	30000 - 2055	17200 - 1178	18500 - 1267	9100 - 623
Temperature	°C °F	-40 / +93 -40 / +200	-40 / +93 -40 / +200	+5 / +93 +40 / +200	+5 / +105 +40 / +220	+5 / +93 +40 / +200	-40 / +65 +40 / +150
Belt Weight	kg/m² lb/sqft²	8.7 / 1.78	8.7 / 1.78	8.7 / 1.78	5.7 / 1.17	5.7 / 1.17	6.0 / 1.23

Diameter of idling rollers (min.)		Diameter of support rollers (min.)		Diameter for gravity take up center drive rollers (min.)		Backbending radius for elevators without side guards or hold down devices (min.)		Backbending radius for elevators with side guards or hold down devices (min.)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
50	2	50	2	100	4	150	6	250	10

Belt Width mm	76,2	152,4	228,6	304,8	381,0	457,20	533,4	609,6	685,8	762,0	838,2	914,4	990,6	1066,8	1143,0	1219,2	1371,6
Belt Width inch	3.00	6.00	9.00	12.00	15.00	18.00	21.00	24.00	27.00	30.00	33.00	36.00	39.00	42.00	45.00	48.00	54.00
Belt Width mm	1447,8	1524,0	1600,2														
Belt Width inch	57.00	60.00	63.00														

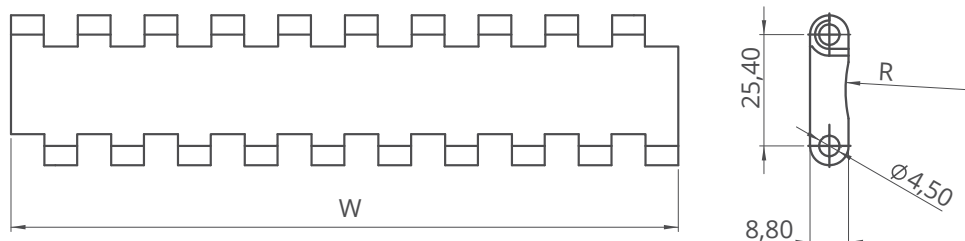

Product Features and Functional Benefits

- Unique sprocket engagement - higher product load and longer conveyors.
- Unique sprocket engagement reduces pulsation and increases load capacity.
- Close transfer applications.
- Extra power, bi-directional belt for long conveyors.
- Chamfered belt edges.

Important Notes

- Standard belt increments 76,2 mm.
- Non-standard belt increments 15,2 mm.
- Please contact with customer service for precise belt measurements.
- For PP material up to 750 mm (30") -3 mm to 0 mm and -0.4% to 0% for wider belts.
- For POM material up to 750 mm (30") -2 mm to 1 mm and -0.2% to 0.2% for wider belts.
- Special raw materials and additional colors available.

XP254 Series



Sprockets and Technical Specifications



Z18



Z18

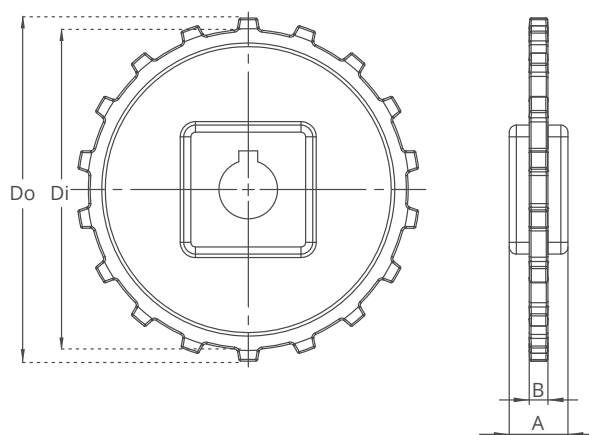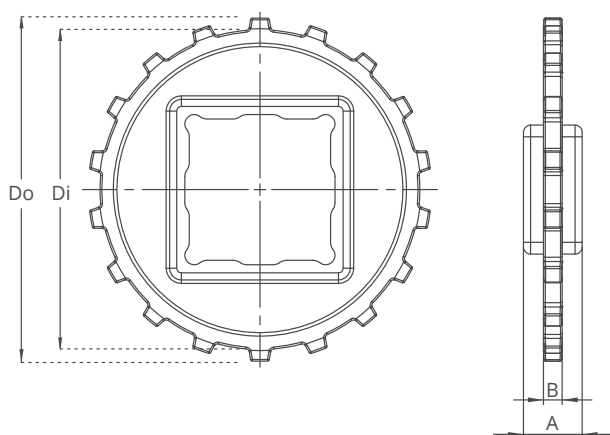

Split molded sprockets are available for the products with "Red" font color.

XP254 Series / Standard Sprockets Dimensions

NO. TEETH	Di mm/inch	Do mm/inch	B mm/inch	A mm/inch	Square Bore (Q) mm/inch		Round Bore (R) mm/inch		PRODUCT CODE	
									Square Type (Q)	Round Type (R)
Z8	53,2 / 2.09	64,0 / 2.52	8 / 0.31	25 / 0.98	25	-	25-30	1-1.25	XP254SQZ8*PA	XP254SRZ8*PA
Z10	71,5 / 2.82	81,2 / 3.2	8 / 0.31	25 / 0.98	25-40	1-1.5	25-30	1-1.25	XP254SQZ10*PA	XP254SRZ10*PA
Z12	88,1 / 3.50	98,1 / 3.86	8 / 0.31	25 / 0.98	40	1.5	25-30	1-1.25	XP254SQZ12*PA	XP254SRZ12*PA
Z15*	112,8 / 4.44	122,4 / 4.82	8 / 0.31	25 / 0.98	40-60	1.5-2.5	25-30	1-1.25	XP254SQZ15*PA	XP254SRZ15*PA
Z18*	136,4 / 5.37	146,4 / 5.76	8 / 0.31	25 / 0.98	40-60	1.5-2.5	25-30	1-1.25	XP254SQZ18*PA	XP254SRZ18*PA

*Other sprockets and hub sizes are manufactured up to request. *POM (Acetal) and PP (Polypropylene) sprockets raw material is available on request.


*Machined Split Sprockets are available for each size.




Clamp



Machined Split Sprocket

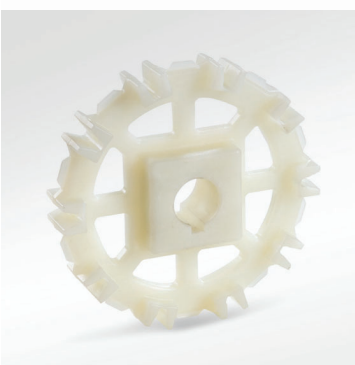


Moulded Sprocket

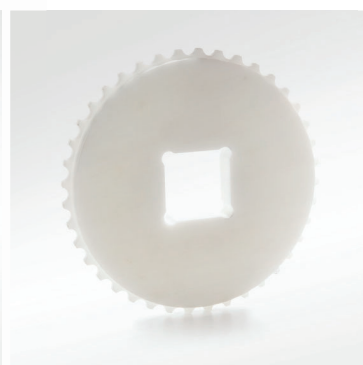

Machined Sprocket




XP254 Series

Accessories and Technical Specifications

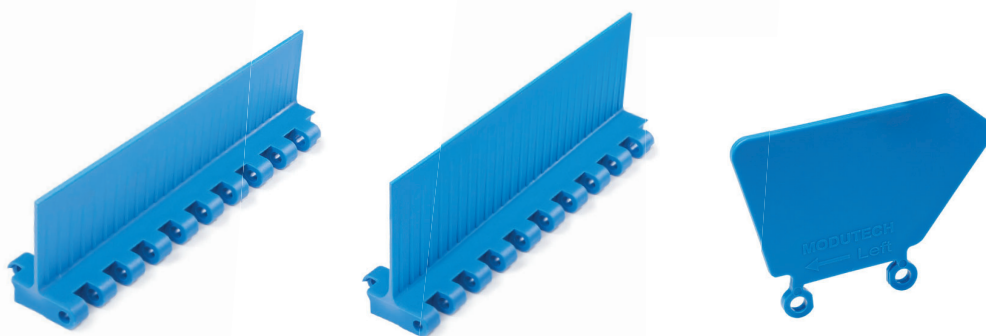

XP254 Series / Flight & Sidewall Dimensions

XP254 Series / Flights & Sidewalls				
PRODUCT CODE	Flight Height (mm/inch)	Flight Width (mm/inch)	PRODUCT CODE	Sidewall Height (mm/inch)
-	-	-	XP254SW12.7	12,7 / 0,5
XP254T25	25 / 1	152,4 / 6	XP254SW25	25 / 1
XP254T50	50 / 2	152,4 / 6	XP254SW50	50 / 2
XP254T75	75 / 3	152,4 / 6	XP254SW75	75 / 3
XP254T100	100 / 4	152,4 / 6	XP254SW100	100 / 4

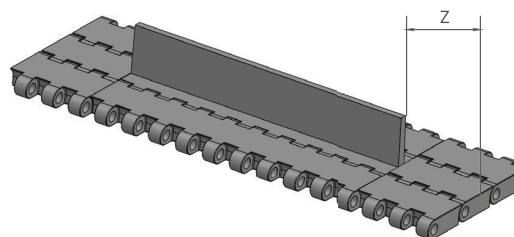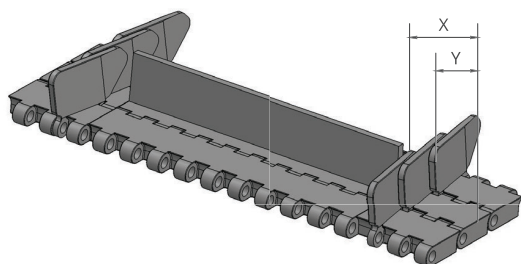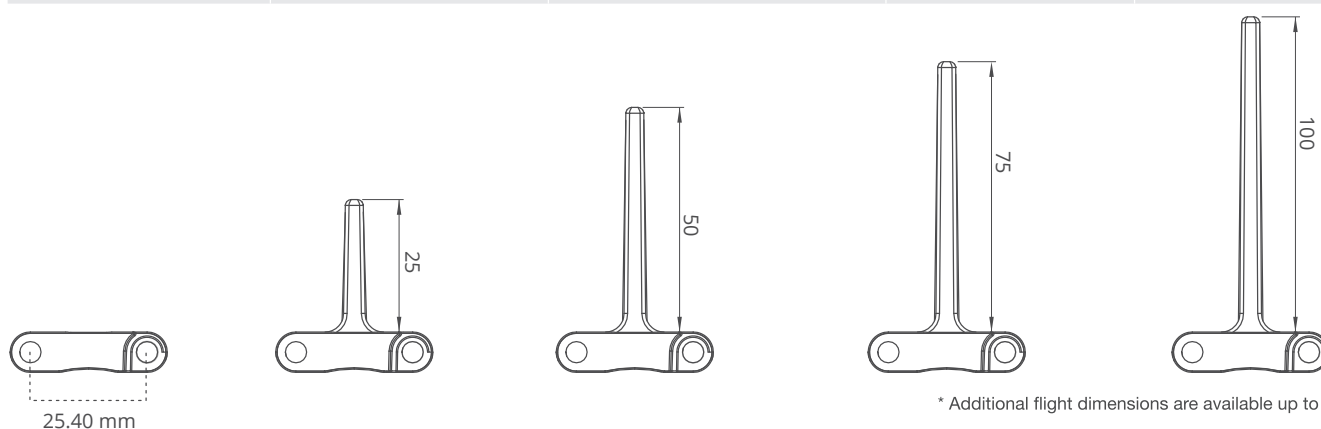

XP254 Series / Flight & Sidewall Technical Specifications


Possible Sidewall and Flights Indents	X		Y		Z	
	mm	inch	mm	inch	mm	inch
Standard, module cutting	24,1	0,95	13,7	0,54	30,5	1,20
Non-Standard, module cutting	31,9	1,25	21,5	0,84	38,1	1,50
Standard, module cutting	39,3	1,55	28,9	1,14	45,7	1,80
Non-Standard, module cutting	47,1	1,85	36,7	1,44	53,3	2,10
Standard, no module cutting	54,6	2,15	44,2	1,74	61,0	2,40

Note: Gap between flight and sidewall minimum 2-3 mm
Gap between flight and sidewall maximum 10 mm

***Non-standard flight indent is on request.**

XP254 Series

Engineering Information

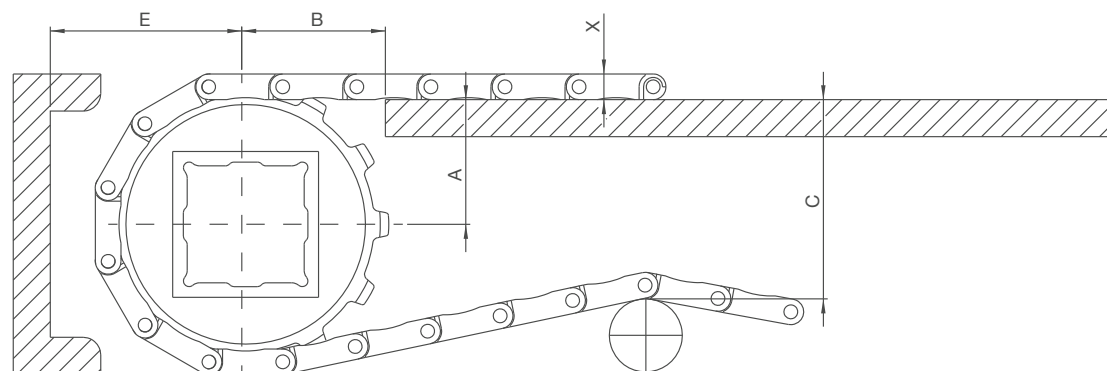


A - $\pm 0,031"$ (1mm)
B - $\pm 0,125"$ (3mm)
C - $\pm$ (Max.)
E - $\pm$ (Min.)

XP254 Series / Conveyor Frame Dimensions

Sprockets Description			A		B		C		E		X	
Pitch Diameter		No.Teeth	Range (Bottom to Top)		inch	mm	inch	mm	inch	mm	inch	mm
inch	mm		inch	mm								
XP254 C, XP254 PR4%, XP254 PR22%, XP254 FG												
2.32	59,0	8	1.17	29,8	1.43	36,5	1.94	49,3	1.91	48,6	0.35	8,8
2.99	76,0	10	1.47	37,0	1.69	42,9	2.57	65,4	2.21	56,2	0.35	8,8
3.59	91,2	12	1.79	45,5	1.86	47,3	3.19	81,1	2.53	64,3	0.35	8,8
4.65	118,0	15	2.22	56,3	2.13	54,1	4.15	105,3	2.96	75,1	0.35	8,8
5.67	144,0	18	2.71	69,0	2.31	58,7	5.16	131,0	3.45	87,8	0.35	8,8
XP254 BT												
2.32	59,0	8	1.17	29,8	1.44	36,5	1.94	49,3	2.03	51,6	0.50	12,7
2.99	76,0	10	1.47	37,0	1.69	42,9	2.57	65,4	2.33	59,2	0.50	12,7
3.59	91,2	12	1.79	45,5	1.86	47,3	3.19	81,1	2.65	67,3	0.50	12,7
4.65	118,0	15	2.22	56,3	2.13	54,1	4.15	105,3	3.07	78,1	0.50	12,7
5.67	144,0	18	2.71	69,0	2.31	58,7	5.16	131,0	3.57	90,8	0.50	12,7
XP254 GT												
2.32	59,0	8	1.17	29,8	1.43	36,5	2.06	52,3	2.03	51,6	0.46	11,8
2.99	76,0	10	1.47	37,0	1.69	42,9	2.69	68,3	2.33	59,2	0.46	11,8
3.59	91,2	12	1.79	45,5	1.86	47,3	3.32	84,3	2.65	67,3	0.46	11,8
4.65	118,0	15	2.22	56,3	2.13	54,1	4.26	108,3	3.07	78,1	0.46	11,8
5.67	144,0	18	2.71	69,0	2.31	58,7	5.27	134,0	3.57	90,8	0.46	11,8

XP254 Series / Slider Support System For Straight Running Belts

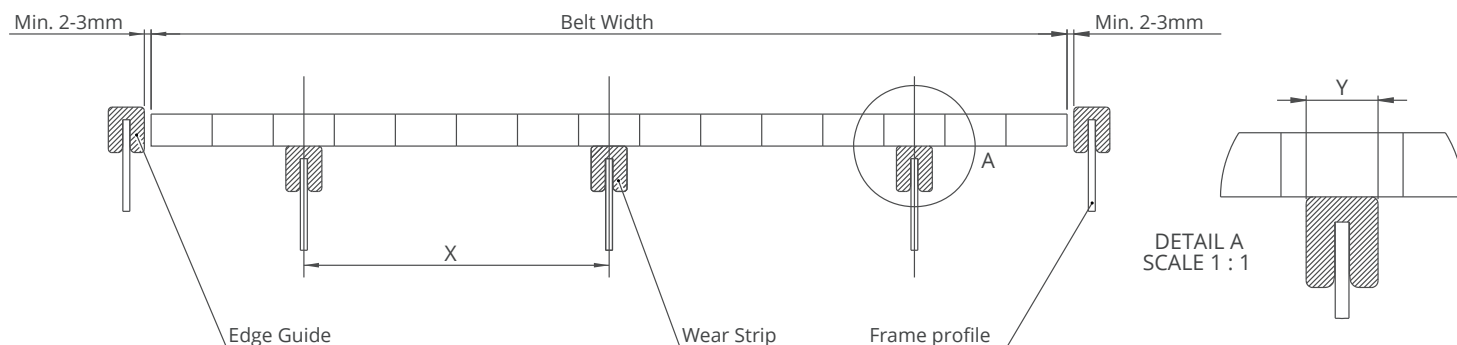


Note: The distances between the carryway wear strips (X) may be changed to due to operation conditions and transported load. In general, we recommend;

100-200mm for 2" belts
100-145mm for 1"belts
100-145mm for 0,5" belts
70-120mm for 0,3" belts

For specific applications, please contact with Modutech representatives.

XP254 Series

Engineering Information

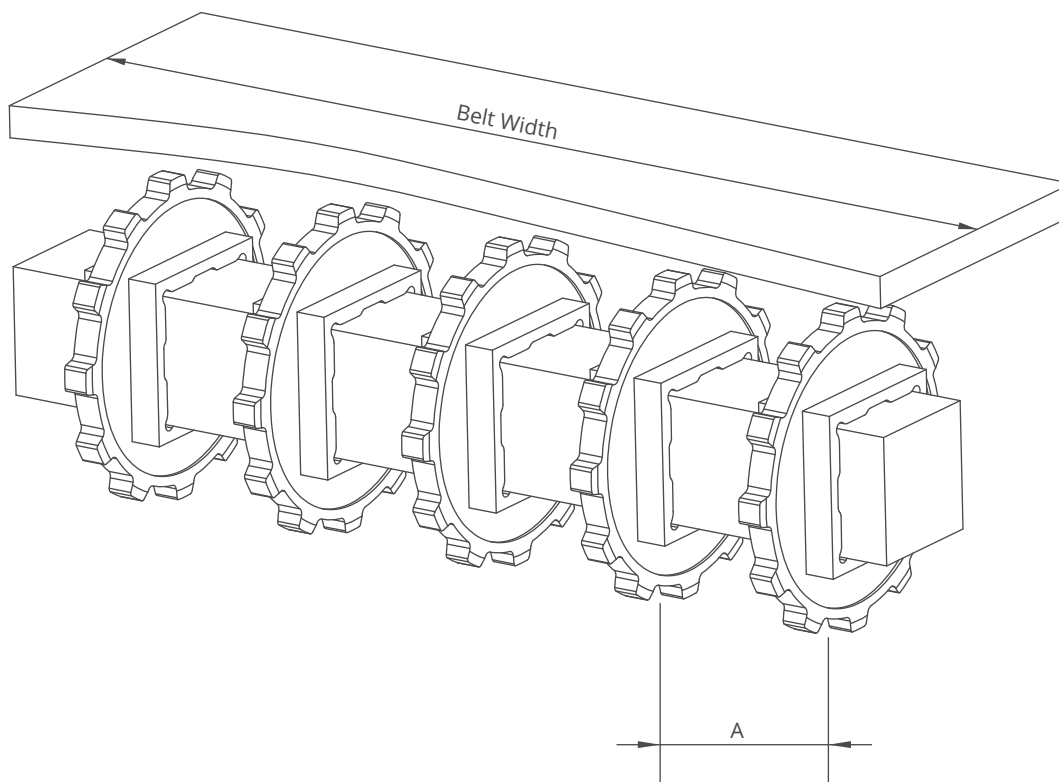

XP254 Series / Sprockets Arrangement

Standard Belt Width		Number of sprockets per shaft		A (mm/inch)	
mm	inch	Drive Shaft	Return Shaft	Min.	Max.
152,4	6.0	2	2	60/2.36	170/6.6
228,6	9.0	2	2	60/2.36	170/6.6
304,8	12.0	3	2	60/2.36	170/6.6
381,0	15.0	4	3	60/2.36	170/6.6
457,2	18.0	5	3	60/2.36	170/6.6
533,4	21.0	5	3	60/2.36	170/6.6
609,6	24.0	6	3	60/2.36	170/6.6
685,8	27.0	6	4	60/2.36	170/6.6
762,0	30.0	7	4	60/2.36	170/6.6
838,2	33.0	7	4	60/2.36	170/6.6
914,4	36.0	8	4	60/2.36	170/6.6
990,6	39.0	8	5	60/2.36	170/6.6
1066,8	42.0	9	5	60/2.36	170/6.6
1143,0	45.0	9	5	60/2.36	170/6.6
1219,2	48.0	10	5	60/2.36	170/6.6
1295,4	51.0	10	6	60/2.36	170/6.6
1371,6	54.0	11	7	60/2.36	170/6.6
1447,8	57.0	11	7	60/2.36	170/6.6
1524,0	60.0	12	7	60/2.36	170/6.6
1600,2	63.0	12	8	60/2.36	170/6.6
1676,4	66.0	12	8	60/2.36	170/6.6
1752,6	69.0	13	8	60/2.36	170/6.6
1828,8	72.0	14	9	60/2.36	170/6.6
1905,0	75.0	14	9	60/2.36	170/6.6
1981,2	78.0	15	10	60/2.36	170/6.6
2057,4	81.0	15	10	60/2.36	170/6.6

Note: Number of sprockets depends on the belt load.